


PORTABLE AIR INFLATOR PB250

TECHNICAL SPECIFICATION

PORTABLE AIR INFLATOR PB250


Application

The Vikoma portable air inflation units may be used on all Vikoma beach or vessel deployed boom systems. The units are also suitable for floating storage tanks. Each inflation unit comes with five metres of deflation hose.

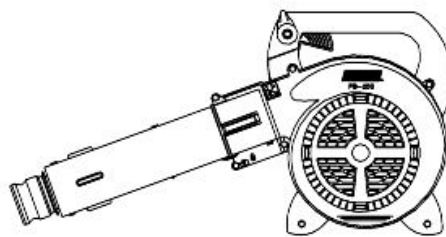

Available Models

- AB/0057 A7 push-in adaptor
- AB/0058 XG push-in adaptor
- AB/0059 Monsun MK XII type adaptor

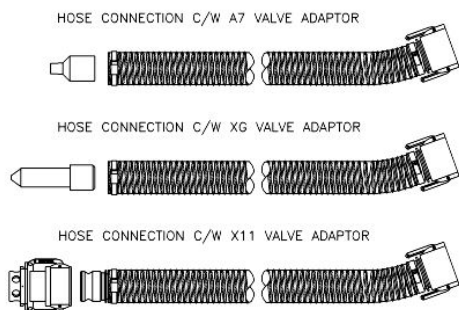

Construction

Aluminium castings, pressed steel sheet sections, rigid plastic.

Engine

- Single cylinder air cooled two-stroke petrol.
- Engine displacement 25.4cm³
- Carburettor diaphragm
- Fuel tank capacity 0.47 litre
- Average air volume 11m³/min
- Max engine speed 7400 rpm

Starting

Pull start with electronic ignition.

Throttle

PB250 hand held models have a throttle trigger incorporated into the handle with three position throttle lock for ease of use during deployment operations.

Dimensions (unit only)	
Length	23cm
Width	33cm
Height	34.5cm
Weight	4.5Kg

Standard Ancillaries	
5m flexible hose with quick release coupling at one end and inflation adaptor at the other	
Operation and maintenance manual	

Optional Accessories	
Spares kit (SK/0735)	