

VIKOTANK


Part No **BP/4324 (13 m³)**
BP/4322 (6 m³)
BP/4404 (2.5m³)

Application

The Vikotank range of open top storage tanks are light and low volume when empty. During filling the fabric structure self elevates and assumes a very stable configuration even in high winds. No tools or support structure are required for Vikotanks, making them a first choice emergency or long term liquid storage facility. The Vikotank range may be used under any climatic conditions, and applications include oil spill recovery, fire fighting, pressure washing and water storage.

Construction

High frequency welded to guarantee seam integrity from single ply nylon weave material with a polyurethane based thermoplastic coating. The tank is fabricated with a closed cell, foam filled collar for extra stability.

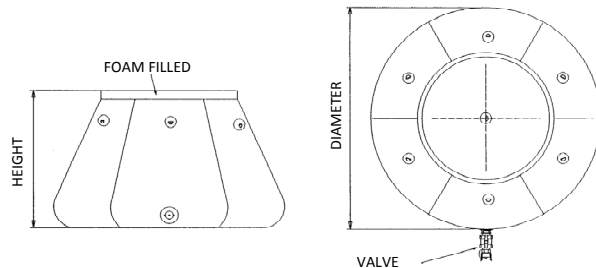

Accessories Included

A central internal stainless steel lifting ring is provided for use during cleaning operations.(4214SL)
 All tanks are fitted with external stainless steel, top cover restraint rings (4214SL)
 All sizes of Vikotank are supplied with an integral 2" ball valve with 3" male Camlock for drainage (5000BV)

Dimensions

	Vikotank 13 m ³	Vikotank 6 m ³	Vikotank 2.5 m ³
Capacity	13,000 litres	6,000 litres	2,500 litres
Height	138 cm	143 cm	110 cm
Diameter	404 cm	256 cm	220 cm
Dry Weight	30 kg	25 kg	14 kg
Material Weight	1000 gms/m ²	1000 gms/m ²	1000 gms/m ²
Packed Size	104 x 62 x 60 cm	100 x 60 x 60 cm	98 x 58 x 58 cm

Optional Accessories

	Vikotank 13 m ³	Vikotank 6 m ³	Vikotank 2.5 m ³
Top Cover	(BP/0182)	(BP/0292)	(BP/0204)
Ground Sheet / Valise	---	(BP/0216)	(BP/0205)
Ground Sheet	(BP/0183)	---	---
Carrying Holdall	(BP/0184)	---	---
Repair Kit Cold Glue	SK/1009	SK/1009	SK/1009
Repair Kit Hot Air	SK/1045	SK/1045	SK/1045